# NOVOS Touch KNX

Room operating unit temperature, optional with humidity | CO2 | VOC

thermokon®
HOME OF SENSOR TECHNOLOGY

## Datasheet

Subject to technical alteration
Issue date: 20.07.2026 • A200

## » APPLICATION

Room control unit with room temperature measurement, optional humidity, CO2, or VOC and a monitoring function for colourful visualization of the measured values. The maintenance-free sensor creates conditions for a pleasant indoor climate and well-being. Typical applications are schools, office buildings, hotels or cinemas. The room control unit has a high-resolution 4.8”-display with a noble glass surface and has to be mounted in a flush-mounted box. The innovative and self-explanatory operation offers the functions of light, shading, climate and scene control for intelligent room automation.

## » TYPES AVAILABLE

**Touch screen room operating unit temperature + opt. humidity, CO2, VOC – Active BUS**

- thanos EVO Temp KNX
- thanos EVO Temp_rH KNX
- thanos EVO CO2 Temp_rH KNX
- thanos EVO VOC Temp_rH KNX
- thanos EVO CO2+VOC Temp_rH KNX

*available in the colours white and black*

## » SECURITY ADVICE – CAUTION

The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorized modifications are prohibited! The product must not be used in relation to any equipment that in case of failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installation. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

## »NOTES ON DISPOSAL

The cross-out wheelie bin symbol indicates that the product or removable batteries must not be disposed of with household or commercial waste. Within the EU, you are legally obliged to dispose of the product separately and appropriately in accordance with the national laws of your country. Alternatively, please contact your supplier or Thermokon Sensortechnik GmbH. Further information can be found at: www.thermokon.com

## »MOUNTING ADVICE ROOM SENSORS

The accuracy of the room sensors is influenced by their technical specifications as well as their installation position and mounting method.

**During installation, observe the following:**

- Seal the flush-mounted wall box (if applicable).
- Air drafts, heat sources, radiant heat, or direct sunlight at the installation location may affect the measurement.
- The building material at the installation location (e.g. brick, concrete, stud walls, or cavity walls) may affect the measurement.

**Installation is not recommended in the following locations:**

- Areas exposed to air drafts (e.g. near windows, doors, or ventilation outlets)
- Near heat sources
- In direct sunlight
- In niches or behind/between furniture

## »BUILD-UP OF SELF-HEATING DUE TO ELECTRICAL POWER DISSIPATION

Sensors with electronic components always dissipate power, which affects the measurement of the ambient air temperature. In active temperature sensors, the power dissipation increases linearly with the operating voltage. This dissipated power must be considered when measuring temperature. With a fixed operating voltage (±0.2 V), this can normally be compensated for by applying a constant offset value.

Thermokon transducers can be operated with variable operating voltages. The transducers are factory-calibrated at a reference operating voltage of 24 V =. At this voltage, the expected measurement error of the output signal is minimized. Operating the transducers at other voltages may result in measurement deviations due to changes in the power dissipation of the sensor electronics.

Recalibration can be performed either directly on the device or via a software parameter (app or bus).

**Note: Airflow improves the dissipation of heat generated by the sensor electronics. As a result, temporary fluctuations in the measured temperature may occur.**

## »APPLICATION NOTES FOR HUMIDITY SENSORS

Under normal environmental conditions, it is recommended to calibrate the sensor annually to verify that it continues to meet the accuracy requirements of the application. The following conditions may damage the sensor element or, over time, cause it to fall outside the specified accuracy:

- Mechanical stress
- Contamination (e.g. dust or fingerprints)
- Exposure to aggressive chemicals
- Adverse ambient conditions (e.g. condensation on the sensor element)

**Do not touch the sensor element!**

**Recalibration or replacement of the sensor element is not covered by the standard warranty.**

## »INFORMATION ON THE CO2 SELF-CALIBRATION FEATURE

All gas sensors are subject to drift over time. The extent of this drift depends on the components used and the overall product design. In addition, the following environmental conditions may accelerate sensor aging and increase drift:

- Mechanical stress (including stress caused by temperature fluctuations)
- Contamination (e.g. dust or fingerprints)
- Exposure to aggressive chemicals
- Adverse ambient conditions (e.g. high humidity or condensation on the sensor element)

An integrated self-calibration function based on dual-channel technology automatically compensates for this drift. Thermokon sensors are designed for continuous operation, making them suitable for applications with permanent occupancy (e.g. hospitals).

## »INFORMATION ON INDOOR AIR QUALITY CO2

EN 13779 defines several classes for indoor air quality:

| Category | CO2 content above the outdoor air concentration in ppm | | Description |
|---|---|---|---|
| | Typical range | Standard value | |
| IDA1 | <400 ppm | 350 ppm | Good indoor air quality |
| IDA2 | 400..600 ppm | 500 ppm | Standard indoor air quality |
| IDA3 | 600..1.000 ppm | 800 ppm | Moderate indoor air quality |
| IDA4 | >1.000 ppm | 1.200 ppm | Poor indoor air quality |

## »APPLICATION NOTES FOR VOC AIR QUALITY SENSORS

Volatile organic compounds (VOC) are gaseous and vaporous substances of organic origin present in the air. VOC-sensors monitor the significant part of humanly olfactory sensed air quality. (e.g. body odour, tobacco smoke, odour of materials, furniture, carpets, paint, adhesives, etc)

**The VOC value is an application-specific indicator of air quality**
**and does not provide any information about individual VOC components**

A VOC sensor oxidizes organic molecules that meet its sensing element, resulting in a change in the semiconductor's resistance.

**Any contact with the sensitive sensor element must be avoided, as it may invalidate the warranty.**

The VOC sensor is factory-calibrated and can be recalibrated via the NOVOSapp if required.

## »PRODUCT TESTING AND CERTIFICATION

CE

**Declaration of conformity**
The declaration of conformity of the products is available on our website
https://www.thermokon.de/direct/en-gb/categories/novos-touch

## » TECHNICAL DATA

| | |
|---|---|
| **Measuring values** | Temperature, optional humidity \| CO2 \| VOC |
| **Network technology** | KNX (TP1) |
| **Power supply** | 24 V = (±10 %) SELV<br>Power supplies with a 'hiccup' start-up behaviour are not suitable.<br>*When using AC voltage, care must be taken to ensure correct polarity.* |
| **Power consumption** | Typ. 3 W (24 V =) |
| **Bus current consumption** | 3 mA |
| **Measuring range temp** | 0..+50 °C |
| **Accuracy temperature** | ±0,5 K (typ. at 21 °C) |
| **Inputs** | 3 x input for floating contact \| or 2 x input for floating contact + 1 x input for external NTC10k) |
| **Control functions** | Occupancy signalling, light ON/OFF/DIM, setup scenarios, blinds UP/DOWN/SET, fan stages, setpoint, ECO-Function, measured value RGB-LED indication /display & history. |
| **Display** | TFT 4,8", 1120x480 px, capacitive touch technology |
| **Enclosure** *(type dependent)* | PC V0, pure white, design surface glass<br>enclosure: white or black, design cover: glass white or black |
| **Protection** | IP30 according to DIN EN 60529 |
| **Cable entry** | Rear entry |
| **Connection electrical** | Tool-free mountable spring terminal, max. Ø 0,8 mm |
| **Ambient condition** | 0..+50 °C, max. 85 % non-condensing |
| **Mounting** | Surface mounted on flush-mounting box (Ø = 60 mm) , base part can be mounted and wired separately |

### » Humidity *(optional)*

| | | | | |
|---|---|---|---|---|
| **Measuring range humidity** *(optional configurable)* | **Relative humidty** (default) 0..100 % rH | **Enthalpy** 0..85 KJ/kg | **Absolute humidity** 0..50 \| 0..80 g/m³, | **Dew point** 0..+50 \| -20..+80 °C, |
| | configurable via Thermokon NOVOSapp or BUS | | | |
| **Accuracy humidity** | ±2 % between 10..90 % rH (typ. at 21 °C) | | | |

### » CO2 *(optional)*

| | |
|---|---|
| **Measuring range CO2** | 0..2000 \| 0..5000 ppm (configurable via ETS or Thermokon NOVOSapp) |
| **Accuracy CO2** | ±(50 ppm +3 % of reading), (typ. at 21 °C, 50 % rH, 1015 hPa) |
| **Calibration** | Self-calibration dual channel |
| **Sensor** | NDIR (non-dispersive, infrared) |

### » VOC *(optional)*

| | |
|---|---|
| **Measuring range VOC** | 0..100 % |
| **Calibration** | Self-calibration |
| **Sensor** | VOC sensor (heated metal oxide semiconductor) |

## » CONFIGURATION AND COMMISSIONING

The functional description of the device, as well as the KNX interface description, is documented in the KNX manual.

**KNX manual:**
The KNX manual is found on our website https://www.thermokon.de/download

## »CONNECTION PLAN

**Room operating unit – Active KNX**

The power supply and the bus line are connected via socket terminals on the rear of the device.

When the programming button is pressed, the device switches to programming mode and the programming LED lights up.

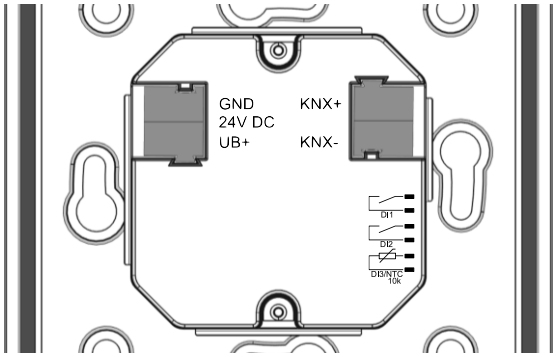


On the side of the lower part of the housing there is a socket connector for connecting up to three digital inputs (optional as an NTC10k). The connection is made via a pre-assembled female connector (included in the scope of delivery).

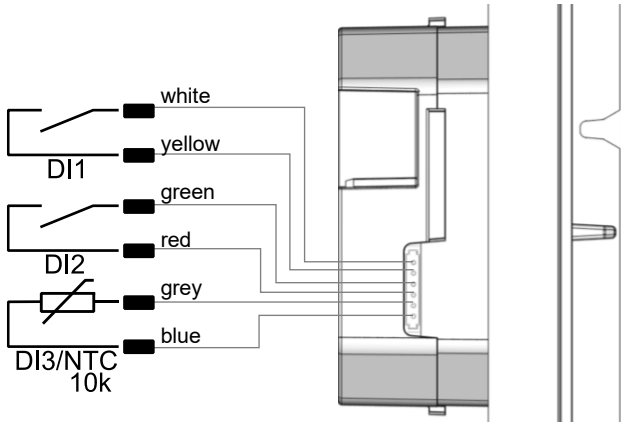


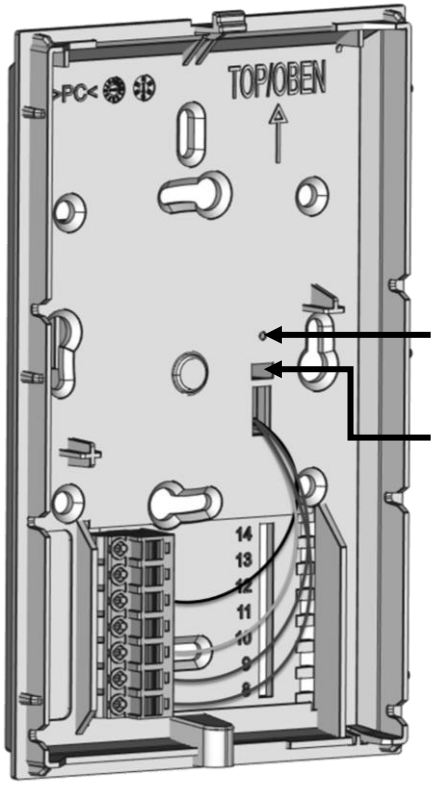


7= n.c.
6= n.c.
5= WH (white)
4= n.c.
3= YE (yellow)
2= BK (black)
1= RD (red)

## »MOUNTING ADVICE

Please ensure that the device is de-energized before installation!

The installation can be performed on a flat wall surface or on a flush-mounted box. A representative installation location should be selected. Direct sunlight and drafts, e.g. through the installation tube, should be avoided to prevent falsification of the measurement result. Seal the end of the installation tube.

- For wiring, the upper part of the device must be removed from the base plate. The base plate and the upper part are detachably connected by means of locking lugs.
- The base plate is mounted on the flat wall surface using wall plugs and screws.
- Finally, the device is attached to the base plate and secured with the screw.

**Snap the upper part of the housing into the locking lug on the upper side**

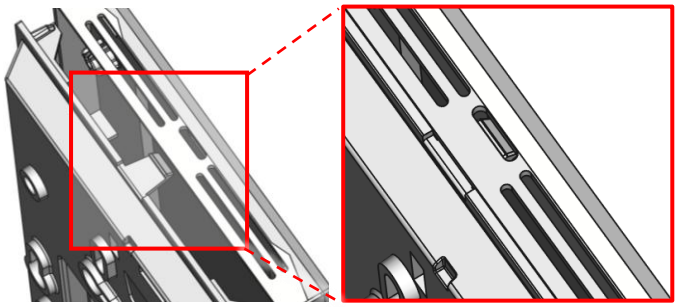

**Secure the upper part of the housing on the underside with the screw**



## »CONFIGURATION

The configuration is performed while the device is powered. The following options are available for configuring the device:

| Device connection | KNX TP1 | Micro-USB | Micro-USB |
|---|---|---|---|
| Configuration adapter | USB-interface KNX | Thermokon USB-Interface | USB-Bluetooth dongle |
| | 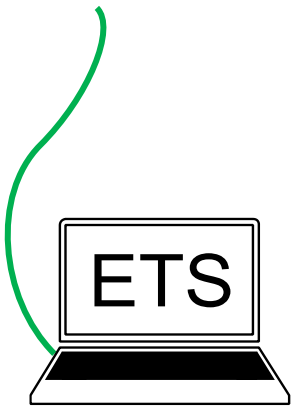 | 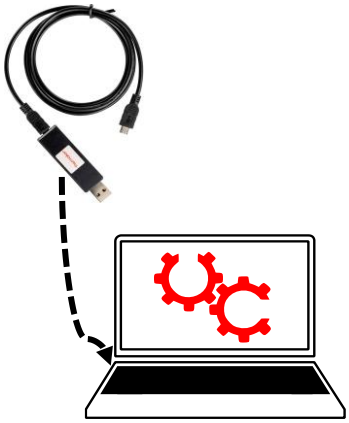 | |
| Configuration software | PC/Notebook with ETS software<br>*Configuration via Desktop PC/Notebook with ETS software and USB-Interface KNX* | PC/Notebook with uConfig software<br>*Partly configuration with Thermokon uConfig software, via Thermokon USB-Interface* | Smartphone/tablet with NOVOS app<br>*Configuration with mobil device via Bluetooth and NOVOSapp. Separately available Bluetooth dongle* required.* |

** Commercially available Bluetooth dongles or USB to Micro-USB adapter cables are not compatible. You need a mobile device that supports at least Bluetooth version 4.1. The configuration app with the corresponding instructions can be downloaded from the Google Play Store or the Apple App Store.*

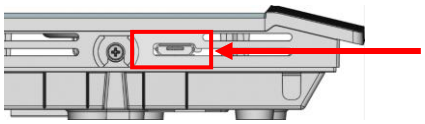

Position of the Micro-USB port, see bottom of the device, for configuration with Bluetooth dongle or Thermokon USB-interface

## »DIMENSIONS IN MM (IN.)

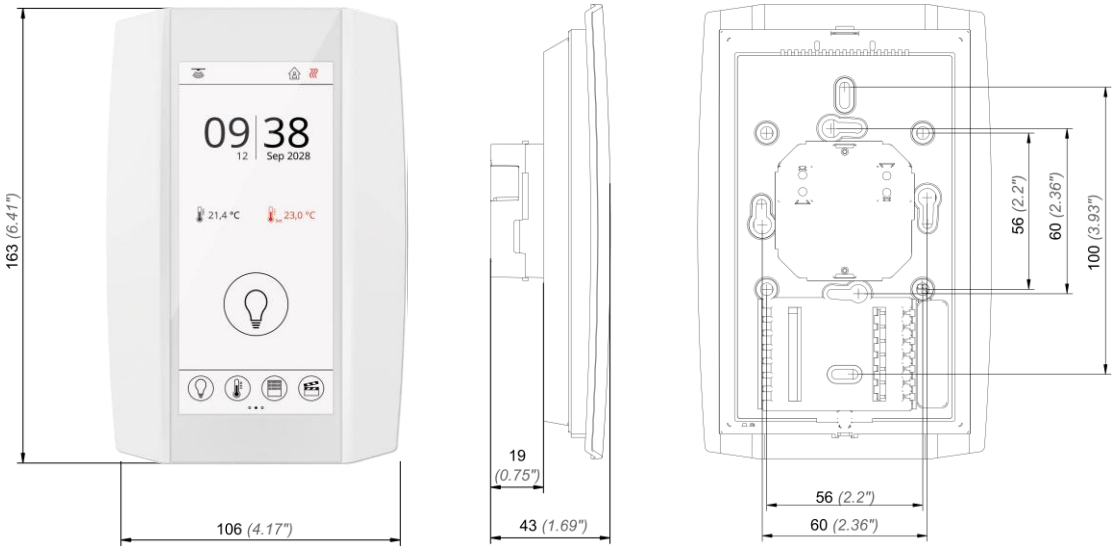


## »ACCESSORIES (OPTIONAL)

| | |
|---|---|
| Wall plugs and screws (2 pcs. each) | Item No. 102209 |
| PSU-UP24 – flush mount power supply 24 V (AC Input: 100..240 V ~ \| DC Output 24 V = 0,5 A) | Item No. 645737 |
| Bluetooth dongle | Item No. 668262 |
| Thermokon USB-Interface | Item No. 597838 |
| USB-Interface KNX | Item No. 806190 |