

JOY HC AO2DO LoRaWAN

Room Regulator

thermokon[®]
HOME OF SENSOR TECHNOLOGY

Datasheet

Subject to technical alteration
Issue date: 12.05.2026 • A165



» APPLICATION

Room thermostat in an appealing design for heating/cooling (24 V) and controlling a 6-way valve. Used for individual control of temperature in commercial and residential buildings. The device combines a modern design with a 2,5" touch surface, which enables the single room controller to be used intuitively. 3 time channels with 4 periods of time can be configured via the menu. This device is suitable for a flush mount box.

» SECURITY ADVICE – CAUTION

The installation and assembly of electrical equipment should only be performed by authorized personnel.



The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

» TECHNICAL DATA

Measuring values	temperature, humidity*, CO2* (<i>optional</i>)
Measuring range temp	0..+50 °C
Accuracy temperature	±1 K (typ. at 21 °C)
Measuring range humidity	0..100% rH non-condensing
Accuracy humidity	±2% between 10..90% rH (typ. at 21 °C)
Measuring range CO2 (<i>optional</i>)*	0..2.000 ppm
Accuracy CO2 (<i>optional</i>)	(5% of measuring value) + 50 ppm
Control functions	setpoint adjustment +0..+50 °C
Display	LCD 60x44 mm, 240x160 px, white backlighting
Functions	integrated PI- and 2-point-/ 3-point-controllers, 2nd control loop: 2-point controller
Enclosure	PC, glass, optional black or white

*Humidity and CO2 measured values are not processed internally. The values are displayed and can be read out by higher-level systems for evaluation and further use.

Protection	IP30 according to EN 60529	
Connection electrical	Terminal 1..8 terminal block max. 1,5 mm ²	Terminal 9..12 terminal block max. 1.0 mm ²
Ambient condition	0..+50 °C, max. 85% rH non-condensing	
Weight	195 g	
Mounting	flush mounted with standard EU box (Ø=60 mm)	

Output voltage	0..10 V =, max. load 5 mA (for 6-way valves)	
Output switch contact	2x normally open contacts (heating/cooling), 24 V max. load 3 A	
Power supply	24 V = (±10%) or 24 V ~ (±10%)	
Power consumption	max. 2,5 W (24 V ~)	
Inputs	DI1 input for NTC 10 K or floating contact	DI2 digital input for non-floating contact (230 V ~)

» LoRaWAN®

Radio technology	LoRaWAN®
LoRaWAN version	1.0.3
Device class	Class C
Frequency	EU868 (863-870 MHz)
Max. transmission power	+14 dBm (25 mW)
Receiver sensitivity	-137 dBm
Antenna	Internal send- / receiver antenna
LoRaWAN Features	Over the Air Activation (OTAA), Adaptive Data Rate (ADR)
Data transmission (configurable)	Heartbeat interval, change of value, hysteresis transmission behavior

» MOUNTING ADVISE ROOM SENSORS

The Accuracy of the room sensors are influenced by the technical specifications as well as the positioning and the installation type.

During Assembly:

- Seal mounting box (if present).
- Installation type, air draught, heat source, radiation heat or direct sunlight can affect the measurement.
- Bulding material specific properties of the installation place (*brick-, concrete-, partition wall, cavity wall, ...*) can affect the measurement.

Assembly not recommendet in...

- Air draught (e.g.: close to windows / doors / fans ...)
- Near heating sources,
- Direct sunlight
- Niches / between furniture / ...

» MOUNTING ADVICES JOY

Plasterboard boxes shall be covered by wall paper or paint to avoid that the plasterboard box's front rim will be partially visible underneath JOY. Maybe consider using white plasterboard boxes (i.e. Kaiser 9063-77).

» CONFIGURATION

» Configuration via uconfig | microsd-card



Configuration software:

uConfig | Microsoft Windows is required to use the uConfig configuration software

The JOY room thermostat can be parameterised using the uConfig configuration software. An SD card is used to transfer the created configuration file to the device. For LoRaWAN devices, a live configuration can also be performed via LoRaWAN Downlink.

The installer for the configuration software can be found in the Download-Section on our website. The installer retrieves all necessary files and plug-ins from our web server. In this version an update function is integrated in the software.


Download-Section <https://www.thermokon.de/download>

» JOY LRW SOFTWARE MANUAL



Detailed information on device functions and software
<https://www.thermokon.de/direct/files/joy-rs485-modbus-manual.zip>

» PARAMETERMENU




Access to Parametermenu:
Press buttons for 3 seconds simultaneously

Menu	
Timechannels	▷
Time/Date	▷
Sensor settings	▷
Common settings	▷

If no entry is made for 8 minutes, the parameter menu is left automatically.

» CO2 FACTORY SETTING

To reset the sensor to factory settings, use the key combination.
This key combination only works in the CO2 sensor settings menu.



» PARAMETER MENU – LORAWAN



The <LoRaWAN Configuration> menu can be password protected via uConfig. The login remains active for 10 minutes after the last key press in the LoRaWAN menu. Default password: 4321


» PRODUCT TESTING AND CERTIFICATION



Declaration of conformity
The declaration of conformity of the products are available on our website
<https://www.thermokon.de/direct/en-gb/categories/joy-hc>

» CONNECTION PLAN

JOY HC AO2DO (24 V ~/=)

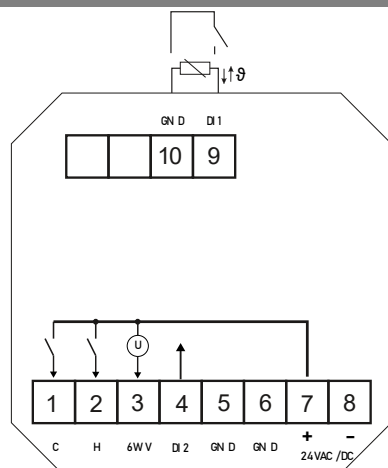

- 1 Cooling**
- 2 Heating**
- 3 0..10 V (6-way valve)**
- 4 Digital Input 2**
- 5 GND**
- 6 GND**
- 7 24 V = (±10%) or 24 V ~ (±10%)**
- 8 GND**

Use twisted and shielded cables in pairs to supply the devices and control line (e.g., J-Y(ST)Y 2x2xØ0.8).

No parallel connection of inputs.
Exception: DI2.

Switching element contacts (changeover, window contact, dew point, etc.) must be designed in accordance with EN/IEC 60947-5-1 (precious metal).


For multiple devices connected together:
AC power supply: Connect + / - in phase.

DC power supply: Connect the "-" terminals of all connected devices with low impedance.

For different power supplies, connect the GND ("-") terminals to each other.

- 9 Digital Input 1 (or NTC10K)**
- 10 GND DI 1**

» DIMENSIONS (MM)

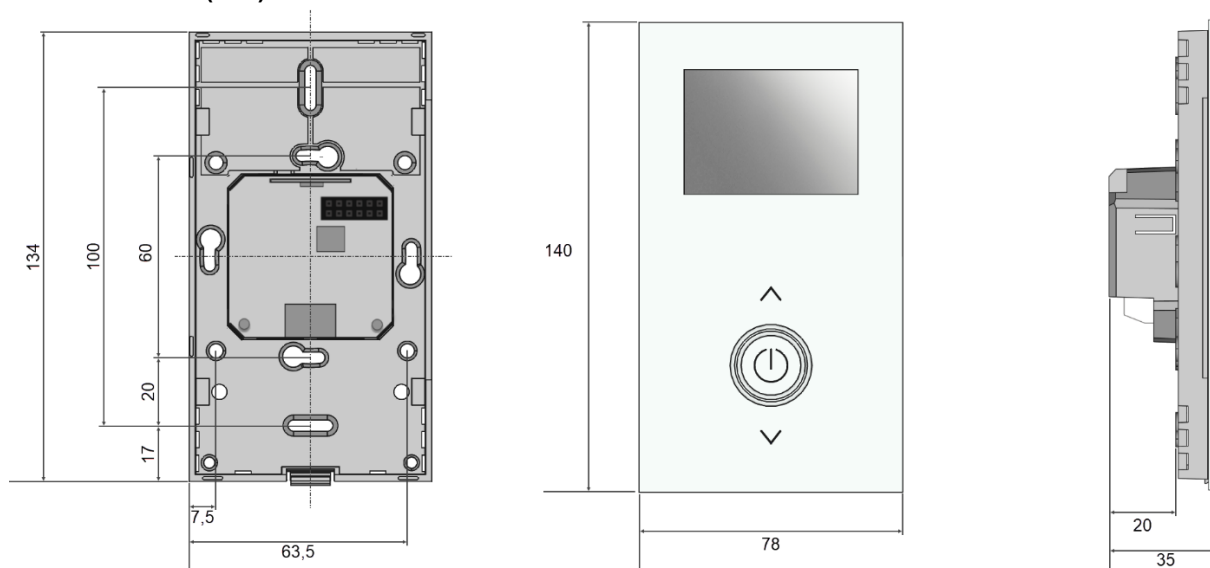

» ACCESSORIES (OPTIONAL)

Frame for surface mounting JOY pure white
Frame for surface mounting JOY black
Decorative frame pure white for JOY
Decorative frame black for JOY
MicroSD card 2GB

Item No. 760201
Item No. 760195
Item No. 681452
Item No. 740951
Item No. 500098

» NOTES ON DISPOSAL



The crossed-out wheeled bin symbol indicates that the product or removable batteries must not be disposed of with household or commercial waste. Within the EU, you are legally obliged to dispose of the product separately and appropriately in accordance with the national laws of your country. Alternatively, please contact your supplier or Thermokon Sensortechnik GmbH. Further information can be found at: www.thermokon.com